 Print Certificate


 Share

ALLIANCE | AGRICULTURE

324



Alliance 324 drive wheel is a heavy duty tractor tire for all types of heavy services. The 45 degree self-cleaning deep lugs are especially designed to provide high traction and long life under hard working conditions, including on-the-road service. A strong nylon carcass ensures full power transmission, as well as good resistance to mechanical failures and moisture deterioration.

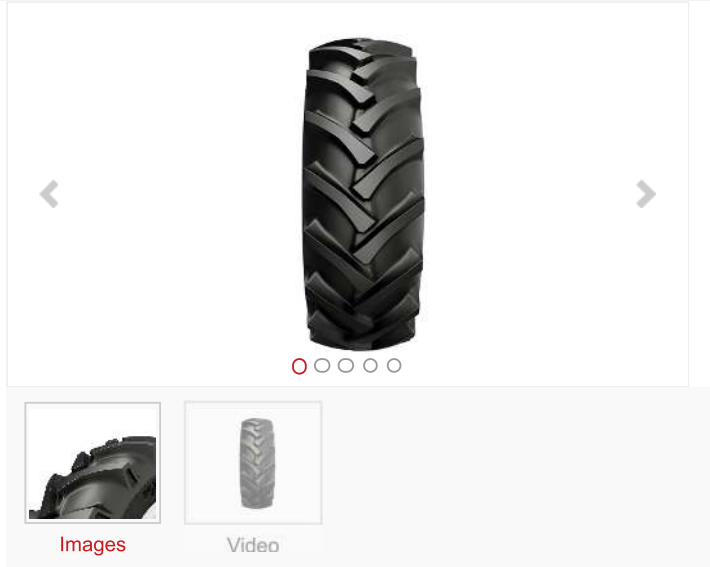

 Send an enquiry

Tire Sizes

18.4/15-26

TRACTOR - 18.4-26



2WD TRACTOR

COMBINE HARVESTER

MFWA

TT

TUBE TYPE

International Standard (mm – bar - kg - kmph)

SIZE	P.R. & LI	TYPE	RIM	O.D. mm	S.W. mm	Rolling Circumference mm	Loaded Static Radius mm	Recommended Load kg	Inflation Pressure bar	Speed km
18.4-26	12 146A8	TT	W16L DW16 W15L	1450	467	4244	646	0	0	0
	8 137A8	TT	W16L DW16 W15L	1450	467	4244	646	0	0	0

SIZE	P.R. & LI	TYPE	RIM	O.D. mm	S.W. mm	Rolling Circumference mm	Loaded Static Radius mm	Recommended Load kg	Inflation Pressure bar	Speed km
	10 142A8	TT	W16L DW16 W15L	1450	467	4244	646	0	0	0
	12 146A8	TT	W16L DW16 W15L	1450	467	4244	646	0	0	0

Note: For abovementioned size 6 PR is no longer active for production. 1) Recommended rims in red. 2) For stationary service (0 km/h) and speed up to 10 km/h inflation pressure must increase by 20%. 3) Field dual: 88% of field load, field triple: 82% of field load. *Alliance allows for Free Rolling application: Load capacity to be increased by 20%, after increasing the inflation pressure by 20%.



ALLIANCE
AGRICULTURE

TRA: **R-1**
Speed Rating: **A8**

Alliance 324 drive wheel is a heavy duty tractor tire for all types of heavy services. The 45 degree self-cleaning deep lugs are especially designed to provide high traction and long life under hard working conditions, including on-the-road service. A strong nylon carcass ensures full power transmission, as well as good resistance to mechanical failures and moisture deterioration.

Note: For abovementioned size 6 PR is no longer active for production. 1) Recommended rims in red. 2) For stationary service (0 km/h) and speed up to 10 km/h inflation pressure must increase by 20%. 3) Field dual: 88% of field load, field triple: 82% of field load. *Alliance allows for Free Rolling application: Load capacity to be increased by 20%, after increasing the inflation pressure by 20%.

